


TECHNICAL DATA (in mm)

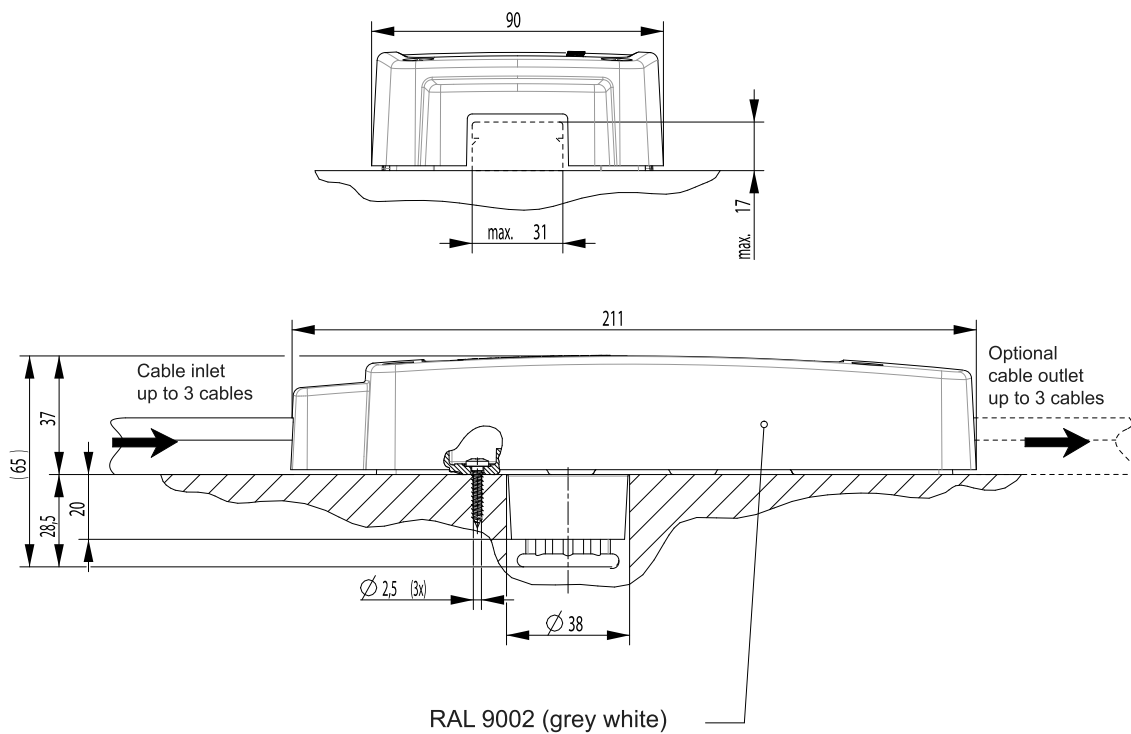

Interfaces:

- Roof hole: Ø 38
- Cable duct: W=31, H=17
- Cables: 2x RF Ø 5; 1xDC max Ø 6.5 - 7 max
- Core-drilled hole in the substrate: 3x Ø 2.5 for self-tapping screws ST 3.5x19

Protection class according to EN 60529: IP55

Packaging:

- Single pack dimensions: L=225; W=165; H=67
- Outer package dimensions: L=358; W=233; H=181 (contains 5 items)

Gross weight: 0.35 kg
 Net weight: 0.25 kg

(single pack dimensions)